



OPTIONS



Logo

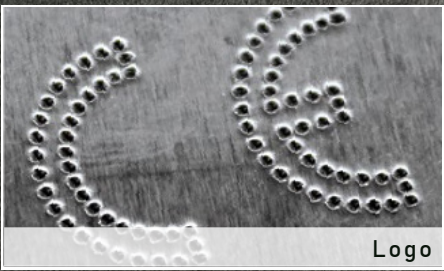


Line

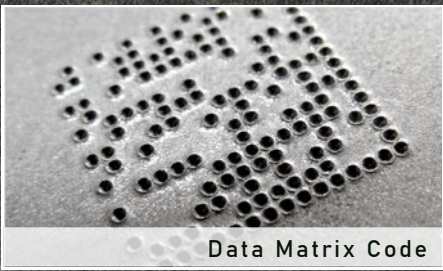


Data Matrix Code

TREATMENTS

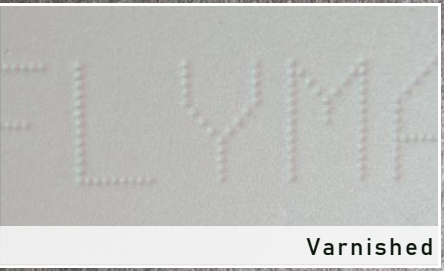

Varnished

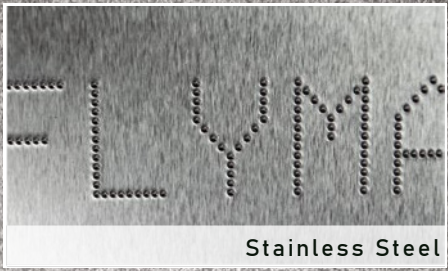

Stainless Steel




Galvanized



Plastic



Hardened Steel

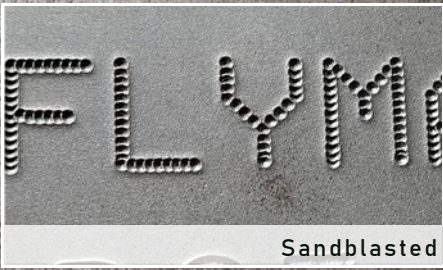

Sandblasted

ALSO AVAILABLE



FlyMarker®mini STATION 120/100

- Capacitive touch screen
- (optional) • Marking area 120 x 100 mm (x/y)



FlyMarker®mini 85/45 *plus*

- Only 3,1 kg (incl. battery)
- Marking area 85 x 45 mm (x/y)



LERO
INNOVATION LTD

87 Springs Road, East Tamaki
Auckland, New Zealand
Ph: 09 274 6186
info@lero.co.nz

www.lero.co.nz



Battery Operated Hand-Held Marking
System FlyMarker® *mini* 65/30

Version 2.0 | All information subject to correction. Images similar. Images may contain optional accessories.

Benefits at a glance

- Attractive price-performance ratio
- Integrated controller (All-In-One)
- Integrated user friendly keyboard mat with numeric keys
- Switchable LED lighting of the marking field
- Pollution-protected electronics
- Drag chain guided electric cables
- Protected interfaces
- One or two-handed operation

Weighs only 2,4 kg (incl. battery)

100 % mobil marking

- Ergonomic device design for energy-saving, non-tiring work.
- Heavy and immovable components are marked on site. • Reduction of occupational accidents due to conventional stroke rate.

Also available as smart control wifi and Touch



Removable handle



Integrated Barcode Scanner (optional)



18V Lithium-Ion-Battery

Fast and smooth navigation

- Latest processor generation
- Clear and intuitive software.
- Numerous language versions available by default.
- Practical preview function for error prevention.
- Helpful tagging variables such as time, date or auto numbering are already included.
- Individual company logos, quality marks or Data Matrix Codes are optional.

Break-resistant and glass-fiber reinforced plastic

Mark permanently and forgery-proof

- Visible marking even after subsequent surface treatment.
- Nearly all materials can be marked – from plastics up to hardened steel (63HRC).
- Adjustable magnet for different materials.

Core technology

- High marking quality thanks to stable, durable mechanics.
- Double guided ruler guides in X and Y direction for distortion-free, multi-line markings without loss of quality.
- High rigidity of the mechanics due to robust basic carrier with integrated setting angle.



Column frame for small parts (optional)

TECHNICAL SPECIFICATIONS

Marking area (x/y)
65 x 30 mm

Available character heights
1,0 to 29,9 mm

Fonts
Medium spaced lettering similar to DIN 1451
in single dot characters (size 5 x 7 or 9 x 13)

Drive of the marking pin
Electromagnetic

Available characters
Numbers 0 - 9, capital letters / small letters A - Z; a - z
various punctuation marks. , / etc.

Interface
2x USB-A, 1x USB-B, 1x Ethernet

Height tolerance compensation
Up to max. 5 mm (constant marking depth also on uneven surfaces)

Weight
2,4 kg incl. battery

Battery capacity
2,0 Ah 18V (Lithium-Ion)
5,2 Ah 18V (optional)

Marking force
Possible force settings (constant impact performance through the complete battery runtime)

Delivery

- Marking System FlyMarker® mini 65/30
- 2x battery 18V/2,0 Ah
- ~~Prüfzettel~~

- Carrying case
- Adjustment tools
- Operating manual